

AS-Interface function module LOGO! standard slave  
 IP20 4 DI/4 DQ Can be used for device series 0BA6 and 0BA7



**General technical data:**

<b>Design of the product</b>		AS-Interface connection for LOGO!
<b>Type</b>		4 inputs (virtual) / 4 outputs (virtual)
<b>Design of the slave type</b>		standard slave
<b>Supply voltage DC</b>	V	24
<b>Status display display of AS-Interface/diagnostics</b>		green/red dual LED

**Inputs:**

<b>Number of digital inputs</b>		4
---------------------------------	--	---

**Outputs:**

<b>Number of digital outputs</b>		4
----------------------------------	--	---

**Ambient conditions:**

<b>Ambient temperature during operation</b>	°C	0 ... 55
<b>Protection class IP</b>		IP20

**Mechanical data:**

<b>Width</b>	mm	36
<b>Height</b>	mm	90
<b>Depth</b>	mm	58

Mounting type

on standard rail

### Certificates/ approvals:

General Product Approval

Declaration of Conformity

Test Certificates



CSA



UL



EG-Konf.

[Miscellaneous](#)

[Type Test Certificates/Test Report](#)

Shipping Approval

other



ABS



LRS



PRS



RINA



RMRS



ASi

other

[Confirmation](#)

[Miscellaneous](#)

### Further information

**Information- and Downloadcenter (Catalogs, Brochures,...)**

<http://www.siemens.com/industrial-controls/catalogs>

**Industry Mall (Online ordering system)**

<http://www.siemens.com/industrymall>

**Cax online generator**


<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mfb=3RK1400-0CE10-0AA2>

**Service&Support (Manuals, Certificates, Characteristics, FAQs,...)**

<https://support.industry.siemens.com/cs/ww/en/ps/3RK1400-0CE10-0AA2>

**Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)**

[http://www.automation.siemens.com/bilddb/cax\\_de.aspx?mfb=3RK1400-0CE10-0AA2&lang=en](http://www.automation.siemens.com/bilddb/cax_de.aspx?mfb=3RK1400-0CE10-0AA2&lang=en)

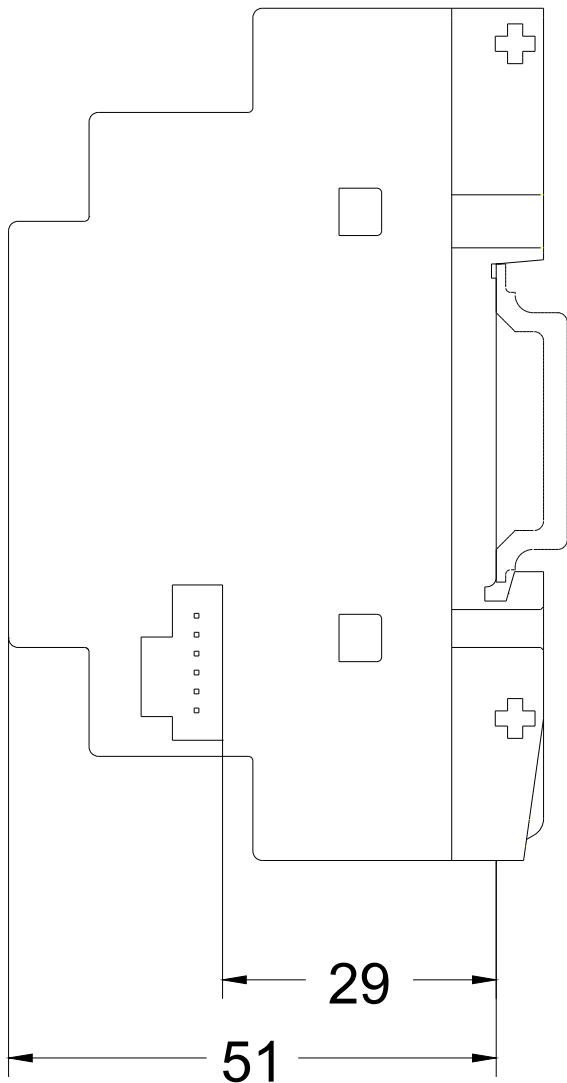

last modified:

04/29/2019

